




3ware® 8006-2LP

High Value 2-Port Serial ATA Hardware RAID Controller

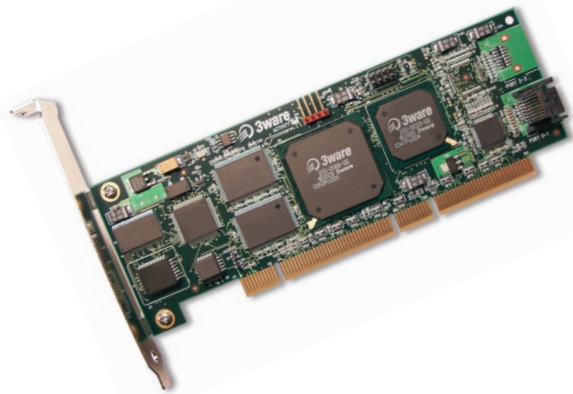

AMCC's 3ware 8006-2LP SATA RAID controller delivers performance, robust fault tolerance with data mirroring for maximum protection, and storage capacity to 1 TB. Combined with an advanced RAID management feature set that includes remote management capabilities, the 8006-2LP is the industry's most compelling PCI to SATA RAID solution.



Highlights

- Supports 1 TB of storage using 500 GB SATA drives
- True hardware RAID protection for all your valuable data
- Advanced, easy-to-use RAID management and configuration suite
- Best hardware RAID price/performance
- StorSwitch™ non-blocking switch fabric architecture for maximum controller throughput
- RAID levels 0, 1, and JBOD

High Performance RAID Storage on Budget

AMCC's 3ware 8006-2LP Serial ATA (SATA) RAID controller economically delivers full-featured true hardware RAID to servers and PC workstations. The 3ware 8006-2LP is a half length low profile 2-port controller. Combined with an advanced RAID management feature set that includes web-based, command-based, and API software components, the 8006-2LP is the industry's most compelling SATA RAID solution for the budget-conscious IT professional. Intelligently engineered in close collaboration with third party motherboard and drive manufacturers, the 3ware 8006-2LP sets the standard for seamless integration.

utility. 3DM software is a browser based management utility for easy local and remote array management in Windows, Linux, and FreeBSD O/S environments.

SATA — The Storage Revolution


Serial ATA provides performance, reliability, ease of configuration, and power consumption advantages over parallel ATA, as well as significant cost advantages over SCSI. SATA is a point-to-point interface protocol designed for improved scalability to meet the performance demands of servers and PC workstations. Each device is attached directly to the host to deliver 1.5 Gbits/sec (150 MB) bandwidth to each drive via thin, flexible, one meter SATA data cables.

Enterprise-class Data Reliability and Management

True hardware RAID is a requirement in IT environments where data availability is paramount. All AMCC 3ware RAID controllers incorporate onboard I/O offload processors to deliver true hardware RAID. Software RAID schemes use the system's processor, exploit host memory, compromise reliability and potentially rob the system of CPU cycles. The 3ware 8006-2LP supports RAID levels 0, 1, and JBOD.

The 3ware 8006-2LP capitalizes on technical advancements in the areas of hot plug capability, signal integrity, reduced pin count, reduced power requirements and longer, thinner cables for simplified routing. The 8006-2LP RAID controller, with the advantages of Serial ATA connectivity, is a compelling solution for enterprise storage installations and PC workstations alike.

Managing RAID installations is simple with 3ware Disk Manager (3DM®), CLI, S.M.A.R.T. disk monitoring and an integrated BIOS configuration

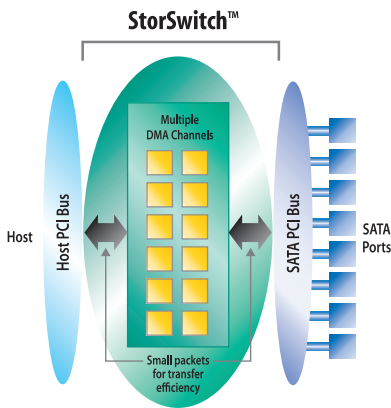

APPLICATIONS FOR 3WARE CONTROLLERS



3ware® 8000 Series

3ware 8000 Series Features

- Supports 1 TB of storage (dependent on drive capacity)
- StorSwitch point-to-point, non-blocking switched architecture
- On-board processor allows true hardware-based RAID and intelligent drive management functions
- SCSI device driver model takes advantage of the benefits of SCSI using inexpensive ATA drives
- Remote browser 3ware Disk Manager (3DM) utility with password security for network management of storage arrays
- SMTP support for email/pager notification
- Easy-to-configure arrays from BIOS, 3DM or CLI utilities
- Staggered spin-up to minimize in-rush current at power up
- Bootable array support for greater fault tolerance
- Hot-swap and hot-spare support for data availability
- Dynamic sector repair for robust data protection
- S.M.A.R.T. disk drive monitoring for reliability
- 2 levels of administrator access to 3DM for added security

3ware 8000 Series Specifications

- Half-length PCI Universal short form factor
- Low Profile
- PCI 2.2 compliant 64-bit/66MHz bus master
- Auto-sensing Serial ATA
- BIOS PnP (plug and play) and BBS (BIOS boot specification) support

Operating System Support

- Microsoft® Windows® 2003/XP/2000, RedHat® Linux, SuSE® Linux, FreeBSD

For complete OS listing, go to:

www.3ware.com/support/OS-Support

3ware 8000 Series Specifications

- Calculated MTBF @ 25°C
 - 1.3 million hours
 - 1.3 million hours
 - 1.2 million hours
 - 1.1 million hours
- Operating Temperature
 - 0°C to 50°C
- Power Requirements
 - 2.5W max. on +5V
 - 6.75W max. on +3.3V
 - 250mW max. on -12V, +12V not used
- Dimensions
 - 7.2"L x 2.5"H (18.288cm x 6.350cm)

Service and Support

- 3-year warranty
- Support via the web at www.3ware.com/support
- For latest motherboard and hard drive compatibility listing go to: www.3ware.com/products/compatibility_sata.asp

Accessories

- RDC-400-SATA Serial ATA RAID Drive Cage
- CBL-SATA-39 39" 1m Serial ATA Cable

3ware 8006-2LP Quick Reference Guide

Form Factor	Half length/low profile
Port Count	2
Drive Support	Up to 2 Serial ATA
Host Interface	PCI
Host Interface Speed	64-bit/66MHz
Connector Type	Discrete
RAID Levels	0, 1, and JBOD
Target Markets	Servers, workstations, gaming, video editing



AMCC reserves the right to make changes to its products, or to discontinue any product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied upon is current.

AMCC is a registered trademark of Applied Micro Circuits Corporation. 3ware, SwitchedRAID and 3DM are registered trademarks in the United States and StorSwitch is a trademark in the United States, of Applied Micro Circuits Corporation. All other trademarks are the property of their respective holders. Copyright © 2006 Applied Micro Circuits Corporation. All Rights Reserved. D58006_01/28/06

3waresales@amcc.com
www.3ware.com
www.amcc.com

Sales Offices for 3ware Products:

USA: +1-877-883-9273
 +1-408-542-8771
 Europe: +44-1925-750-855
 Asia/Pacific: +65-6826-3381
 Japan: +0800-123-9273
 China: +86-10-6581-4916